



RISCALDATORI PER IMMERSIONE **IMMERSION HEATERS**

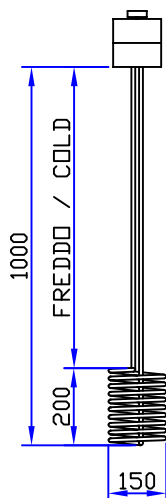


1500 WATT 230 VOLT 1,5 W/cm^q
CON SCATOLA IP55 + TERMOSTATO 4:40°C.
Guaina ø10 mm. AISI 321 Elettrolucidata

1500 WATT 230 VOLT 1,5 W/sq.cm.
WITH IP55 BOX + THERMOSTAT 4:40° C.
Sheath ø 10 mm. AISI 321 Electro-polished

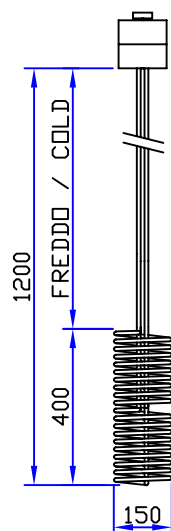

3000 WATT 230 VOLT 1,5 W/cm^q
CON SCATOLA IP55 + TERMOSTATO 4:40°C.
Guaina ø10 mm. AISI 321 Elettrolucidata

3000 WATT 230 VOLT 1,5 W/sq.cm.
WITH IP55 BOX + THERMOSTAT 4:40° C.
Sheath ø 10mm. AISI 321 Electro-polished

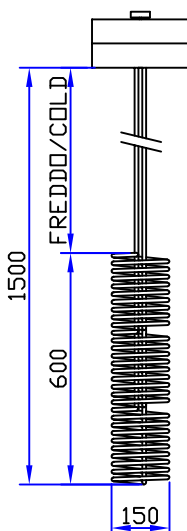

4500 WATT 230/400 VOLT 1,5 W/cm^q
CON SCATOLA IP55 + TERMOSTATO 4:40°C.
Guaina ø10 mm. AISI 321 Elettrolucidata

4500 WATT 230/400 VOLT 1,5 W/sq.cm.
WITH IP55 BOX + THERMOSTAT 4:40° C.
Sheath ø 10mm. AISI 321 Electro-polished